


01DWG

	Minimum Sideways safety zone 0.5M Min (S)
	Minimum longways safety zone 0.5M Min (L)

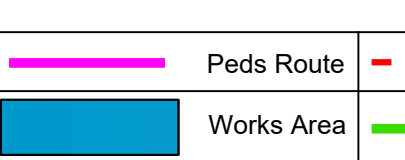

FREE PARKING WILL REQUIRE N.P.C BEFORE WORKS START AS AND WHEN REQUIRED

MAINTAIN RESIDENTS ACCESS AS REQUIRED AT ALL TIMES

RAMPS TO BE USED FOR PEDS AS REQUIRED

Road Widths:

ROAD CLOSED

LANGLEY ROAD

- NOTES:
- All signs and cones to be in accordance with Chapter 8 **new roads and street works a code of practice (Red book)**
 - Works access and egress are indicative, exact locations to be agreed on site.
 - Safety zones are to be installed as required as shown by the **SAFETY ZONE DIMENSIONS** BELOW
 - All signs to be located so as not to obscure signs or objects and should be ballasted near to ground level using sand filled hessian bags or sign straps.
 - All sign positions are indicative only and must be accurately positioned on site with good visibility and be clear of and obstructions or vegetation at all times.
 - Drawing not to scale

PHASE 1

Cadent
Your Gas Network

Traffic Management: -

ROAD CLOSURE

Date Drawn:	22/01/2024
Drawn By:	A.W

KELTIC
TRAFFIC MANAGEMENT

KELTIC TRAFFIC MANAGEMENT
Keltic Yard
Gard Way
Lodbroke Grove
London
W10 5AZ
www.keltictm.co.uk

CADENT, IMGA242092 , Langley Road, Langley, Slough, SL3 7DX, 51.505925,-0.57179408